




Current Transformer

JD32W

Dimension >>>

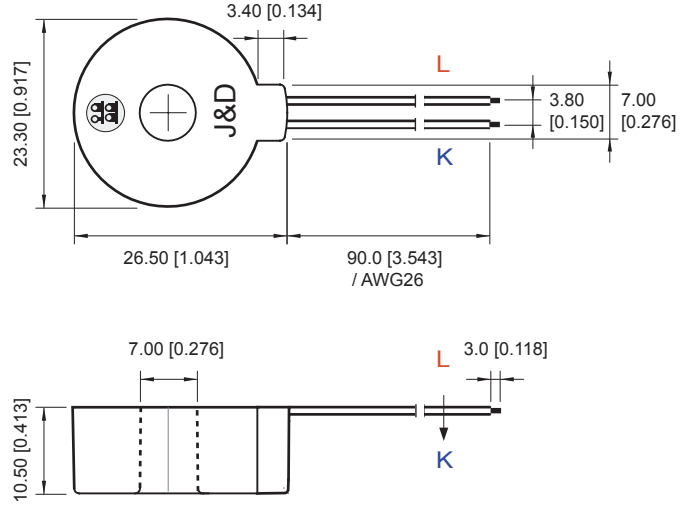


Unit : mm [inch]

Accuracy conforms to IEC 61869-2,
meets the measuring range from 1 to 120 % of I_n

Model	Primary Current Range		Error Phase $\phi(I)$ [°]	Turns Ratio	Characteristical Value					Terminal Structure	Inner Dia. ϕ
	Rated Current	Max Current			I _{max} [Arms]	L [H]	R _{cu} [Ω]	R _B [Ω]	U _B [Vrms]		
JD32W	5/20/40	80	0.28	1:2000	6	100	110	50	0.15	Wire	7

>>> Output Voltage Data

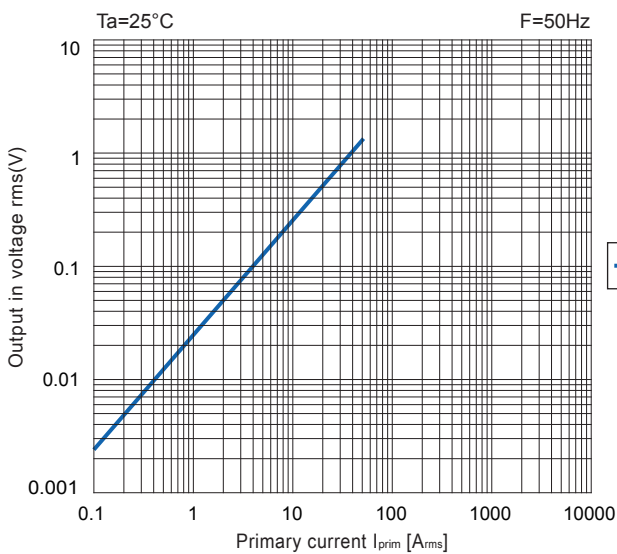

>>> Temperature Date

